



15" Two-Way Bass Reflex Self Powered System

Features:

- ▶ JBL Premium Transducers
- ▶ 1000 W highly efficient Class-D amplification
- ► Maximum SPL Output: 127dB
- ▶ System Type: Self powered 15", two-way, bass-reflex
- Frequency Range (-10dB): 39Hz 20kHz
- Frequency Response (- 3dB): 50Hz 20kHz
- ► Coverage Pattern: 90 x 50
- ▶ Bluetooth Control
 - 3 Parametric EQs + Hi & Lo Shelf
 - Gain and Delay
 - Save and Recall settings
- ▶ JBL Engineered Application Presets
 - Main
 - Monitor
 - Speech
 - Subwoofer
- ▶ 3 x M10 Suspension Points
- ► Standard 35mm pole cup with stabilizing screw
- Lightweight, rugged polypropylene enclosure

Applications:

- ▶ The EON615 is a powered portable PA speaker in the EON600 series from JBL Professional. It has been designed to deliver class leading performance in a variety of applications including use as a main PA, a stage monitor, and rear and side fills. A lightweight, highly useful enclosure allows the speaker to be easily transported and set up wherever sound reinforcement is needed.
- ▶ Enclosure designs have been optimized for ideal acoustic resonance taking advantage of injection molding techniques and mechanical shaping of the enclosures. This results in tremendous increases in cabinet volumes which enable better acoustic performance while maintaining the same footprint. Four intelligently positioned handles make the 600 easy to carry and move around. Integrated hardware mounts, designed into the enclosures, allow each model to be flown when required. And indexed feet molded into the enclosures allow for convenient storage and transport, secure stacking for stage monitor and traditional stand up configurations, and unique acoustic configurations.
- ▶ The EON615's extraordinary performance results from a breakthrough approach to waveguide design. Special fluting is designed into the structure that guides the frequencies through the full range of the system. The result is consistent response throughout its 110 degree coverage pattern. The quality and consistency between on axis and off axis response delivers uniform coverage and high intelligibility throughout the coverage area, which means the EON615's smooth, transparent sound is the same for the entire audience.
- ▶ Bluetooth control over DSP Parameters, presets, and master volume allows users to control up to 4 speakers at one time with iOS and android devices. 3 PEQs and a Hi- and Lo-shelf are built into the speaker and accessible via the EON600 app.



Specifications:

Self powered 15", two-way, bass-reflex
127 dB
39Hz – 20kHz
50Hz – 20kHz
1000W Peak (700 LF + 300HF); 500W Continuous (350W LF + 150W HF)
20k (balanced)
Infinity to 26.8 dBu
Infinity to 29 dBu
+14dBu
-4dBu
2 x Balanced XLR-1/4" combination inputs;
1 x male XLR loop thru out
Front Power LED (Defeatable, white) Rear Power LED (Blue), Bluetooth (Blue), EQ+ (Green) Preset (Green) Signal (Green) Limit (Orange)
Passive
100-120VAC 50/60Hz; 230-240VAC 50/60Hz
1/8th Power – 1.14A (Max), 1/4th Power – 1.71A (Max), 1/3rd Power – 2.03A (Max)
1 x JBL 615H 380mm (15") woofer with 2" voice coil
1 x JBL 2414H-1 25.4mm (1 in) polymer diaphragm, neodymium compression driver
90 x 50
1.8kHz
Polypropylene, black
Both sides
35mm pole socket, 3 x M10 Suspension points
4
Powder coated, Obsidian, perforated steel with acoustically transparent black cloth backing
707mm x 439mm x 365mm (27.8" x 17.3" x 14.4")
39 lbs (17.6 kg)
49.0 lbs (22 kg)


10000

Frequency Response (Main Tuning)


110 110 100 90

Frequency (Hz)


Frequency Response (Monitor)

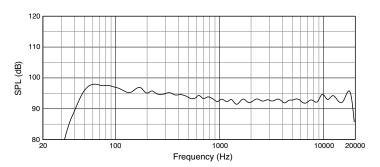


Frequency Response (Speech)

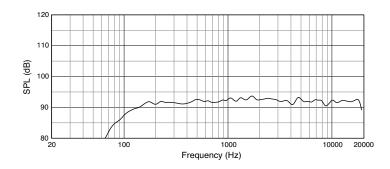



Block Diagram:

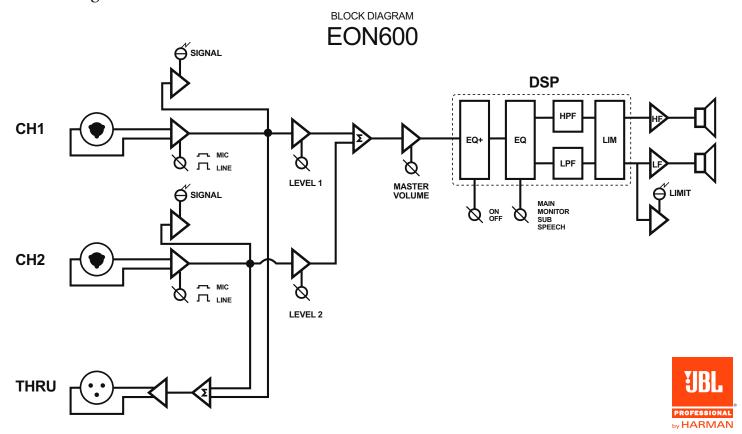



Dimensions:




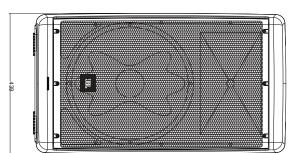



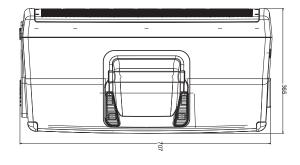

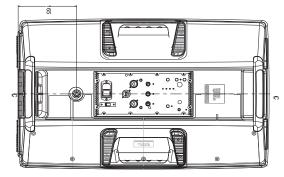

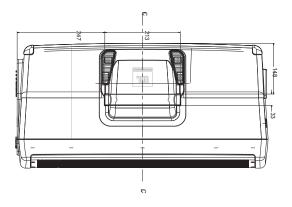



JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A. © Copyright 2015 JBL Professional www.jblpro.com